
INDIANA PICKLING & PROCESSING COMPANY

Push Pull Regenerated Hydrochloric Acid Pickler



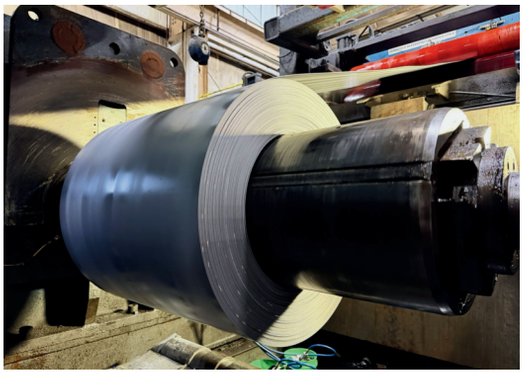

Specifications

Materials: HR, HRPO
Maximum Yield Strengths:
- 120 ksi up to .500" thick
- 100 ksi up to .625" thick
- 49 ksi up to .750" thick

Strip Thickness: 14 gauge to .750"
Strip Width:
- 72" maximum up to .500" thick
- 60" maximum over .500" thick
- 32" minimum

Strip Length: 360' min


Up to 78,250 lbs. max coil weight

Entry Coil ID: 20" min, 30" max
Exit Coil ID: 24" or 30"
Coil OD: 42" min, 82" max

Please consult with IPPC to confirm if your specific requirements may be constrained by these capabilities.

Simplify Your Supply Chain with Feralloy

Let us handle the heavy lifting.
With expertise in steel, Feralloy offers tailored supply chain management solutions to meet your unique needs. From sourcing to delivery, we are committed to streamlining your supply chain process, ensuring a seamless experience for you.

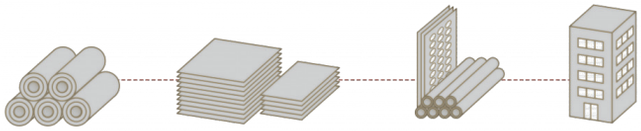

inSight

inSight Customer Portal
Manage your orders with real-time visibility, customized reporting, and mobile access —all through our intuitive inSight Customer Portal.

To learn more or obtain a quote, email sales@feralloy.com or call (219) 787-8889

Indiana Pickling & Processing Company | 6650 Nautical Dr | Portage, IN 46368
(219) 787-8889 | feralloy.com

Updated Oct. 2025